


SURECHECK[®]
electronic retail anti-theft system

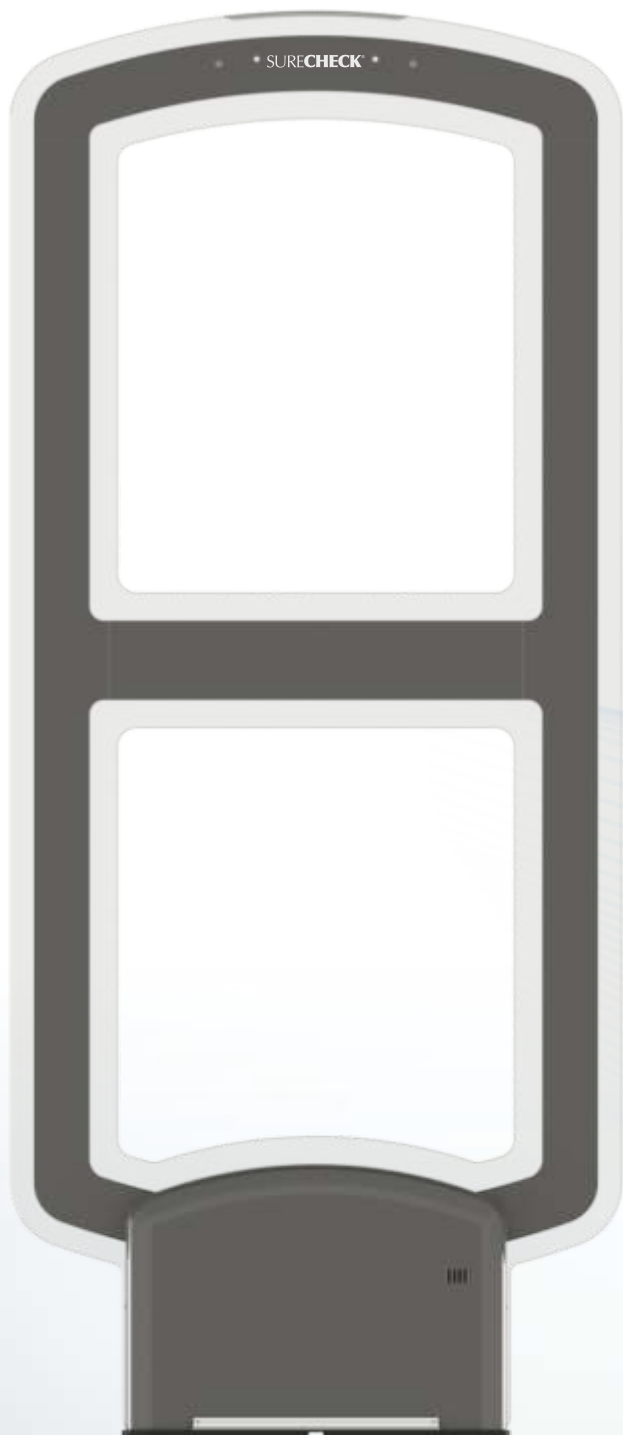

Advanced Electronic Anti-Theft System

AM Series

Powered by

Callidus
trading, spol. s r.o.
Powered by





CPP-380 A3M Digital Security System

58kHz ACOUSTO-MAGNETIC TECHNOLOGY

PRODUCT FEATURES

- State-of-the-art 58KHz AcustoMagnetic Transceiver System
- Quick and simple install and synchronization
- Mono-Transceiver operation with dual extra receiver connectivity
- High Detection rate on Hard Tags and Labels
- Remote maintenance and adjustment over IP
- IP Managed Internal People Counter
- Oscilloscope function to view ambient noise environment
- Multimode Transmitter synchronization with Sync-on-command
- Interference and Jammer detection with distinct Alarm
- Multifunctional Alarm Mapping
- “Tag too close” and “Hardware Error” programmable alarms
- Dual relay alarm outputs for external triggering
- Static and dynamic RGB alarm lighting
- Multi pedestal capable Internal Control Board
- Multi-mode transmitter with temperature control
- Programmable “Green” mode operation at 15 Watts
- Aluminum profile with UV Stabilized Acrylic
- Energy efficient

Optional Accessories

- | | | |
|------------------------|--|---------------------------------|
| Smart Pager System | | AM Label Deactivator |
| E-COMM IP Communicator | | Receiver Antenna (maximum of 2) |

Mechanical

Dimension (in mm) :
382 (W) x 1523 (H) x 70

Pedestal Weight :
13 Kg Trx 8Kg Rx

Composition :
Plastic , Aluminum

Electrical

Power requirement :
100-120VAC@60 Hz
220-240VAC@50 Hz

Operating Frequency:
58Khz

Alarm Mode :
Buzzer/RGB Alarm Indicator


Detection Response

Hard tag :
1.5 m maximum per pedestal (0.7 m / side)
1.8 m maximum between the pedestal

Environmental

Operating Temperature :
32° F - 120° F

Relative Humidity :
0-90%, Non-condensing

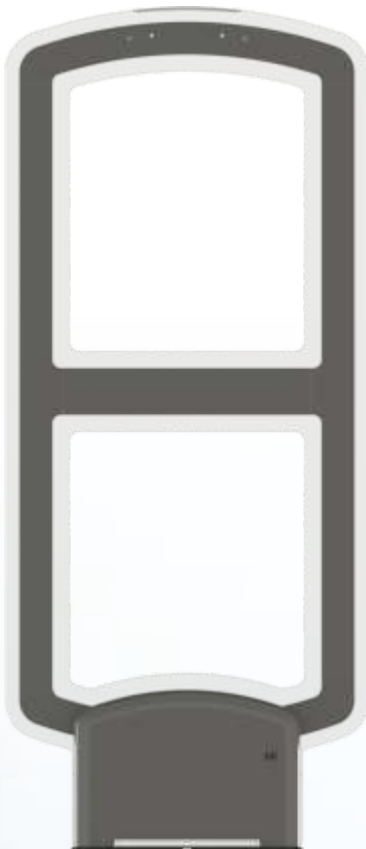

CT-660 AM Digital Security System

58kHz ACOUSTO-MAGNETIC TECHNOLOGY

PRODUCT FEATURES

- Wide profile AM Acrylic Pedestal System
- State-of-the-art 58KHz AcustoMagnetic System
- Quick and simple synchronization
- Multiple pedestal capable Control Box.
- Mono Transceiver or Dual configurations
- High Detection rate on Hard Tags and Labels
- Remote maintenance and adjustment over IP
- IP Managed Internal People Counter
- Oscilloscope function to view ambient noise environment
- Multimode Transmitter synchronization with Sync-on-command
- Interference and Jammer detection with distinct Alarm
- Multifunctional Alarm Mapping
- Dual relay alarm outputs for external triggering
- Dynamic RGB alarm lighting
- Multi-mode transmitter with temperature control
- Programmable “Green” mode operation at 15 Watts
- UV Stabilized Acrylic
- Energy efficient

Optional Accessories

- | | | |
|------------------------|--|----------------------|
| Smart Pager System | | AM Label Deactivator |
| E-COMM IP Communicator | | AM Extender |

Mechanical

Dimension (in mm) :
660 (W) x 1521 (H) x 25^(top)-107^(bottom)

Pedestal Weight :
18 Kg

Composition :
Plastic , Acrylic

Electrical

Power requirement :
100-120VAC@60 Hz
220-240VAC@50 Hz

Operating Frequency:
58Khz

Alarm Mode :
Buzzer/RGB Alarm Indicator

Environmental

Operating Temperature :
32° F - 120° F

Relative Humidity :
0-90%, Non-condensing

Detection Response

Hard tag :
2.1 m maximum per pedestal (1.05 m / side)
2.4 m maximum between the pedestal



CTD-250 AM Digital Security System

58kHz ACOUSTO-MAGNETIC TECHNOLOGY

PRODUCT FEATURES

- Superior technology IC AM Door system
- Slim profile Door-mounted AM Acrylic system
- State-of-the-art 58KHz AcustoMagnetic System
- Quick and simple synchronization
- Multiple pedestal capable Control Box.
- Mono Transceiver or Dual configurations
- High Detection rate on Hard Tags and Labels
- Remote maintenance and adjustment over IP
- IP Managed Internal People Counter
- Oscilloscope function to view ambient noise environment
- Multimode Transmitter synchronization with Sync-on-command
- Interference and Jammer detection with distinct Alarm
- Multifunctional Alarm Mapping
- Dual relay alarm outputs for external triggering
- Static and Dynamic RGB alarm lighting
- Multi-mode transmitter with temperature control
- Programmable "Green" mode operation at 15 Watts
- UV Stabilized Acrylic
- Energy efficient

Optional Accessories

Smart Pager System | AM Label Deactivator

Mechanical

Dimension (in mm) :
250 (W) x 1521 (H) x 48 (top) 65 (middle)

Pedestal Weight :
8.47 Kg

Composition :
Plastic, Acrylic, Aluminum

Electrical

Power requirement :
100-120VAC@60 Hz
220-240VAC@50 Hz

Operating Frequency:
58Khz

Alarm Mode :
Buzzer/RGB Alarm Indicator

Detection Response

Hard tag :
1.8 m maximum between the pedestal

Environmental

Operating Temperature :
32° F - 120° F

Relative Humidity :
0-90%, Non-condensing



MPP-400 AM IC Digital Security System

58kHz ACOUSTO-MAGNETIC TECHNOLOGY

PRODUCT FEATURES

- Superior technology IC AM system
- Narrow profile AM Aluminum pedestal system
- State-of-the-art 58KHz AcustoMagnetic System
- Quick and simple synchronization
- Multiple pedestal capable Control Box
- Mono Transceiver or Dual configurations
- High Detection rate on Hard Tags and Labels
- Remote maintenance and adjustment over IP
- IP Managed Internal People Counter
- Oscilloscope function to view ambient noise environment
- Multimode Transmitter synchronization with Sync-on-command
- Interference and Jammer detection with distinct Alarm
- Multifunctional Alarm Mapping
- Dual relay alarm outputs for external triggering
- Dynamic RGB alarm lighting
- Multi-mode transmitter with temperature control
- Programmable "Green" mode operation at 15 Watts
- Aluminum profile with UV Stabilized Acrylic
- Energy efficient

Optional Accessories

Smart Pager System | AM Label Deactivator
E-COMM IP Communicator | Integrated Metal and Magnet Detetion
AM Extender

Mechanical

Dimension (in mm) :
396 (W) x 1521 (H) x 50

Pedestal Weight :
6.88 Kg

Composition :
Plastic , Aluminium

Electrical

Power requirement :
100-120VAC@60 Hz
220-240VAC@50 Hz

Operating Frequency:
58Khz

Alarm Mode :
Buzzer/RGB Alarm Indicator

Environmental

Operating Temperature :
32° F - 120° F


Relative Humidity :
0-90%, Non-condensing

Detection Response

Hard tag :
1.8 m maximum per pedestal (0.9 m / side)
2 m maximum between the pedestal

PA-450AM Digital Security System

58kHz ACOUSTO-MAGNETIC TECHNOLOGY

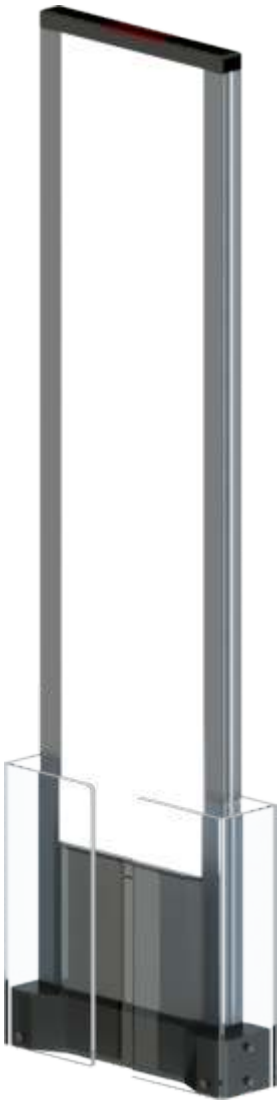

PRODUCT FEATURES

- Integrated Riser and Bumpers for advertisement pedestal
- Taller and wider Profile AM Pedestal system
- State-of-the-art 58KHz AcustoMagnetic System
- Quick and simple synchronization
- Multiple pedestal capable Control Box.
- Mono Transceiver or Dual configurations
- High Detection rate on Hard Tags and Labels
- Remote maintenance and adjustment over IP
- IP Managed Internal People Counter
- Oscilloscope function to view ambient noise environment
- Multimode Transmitter synchronization with Sync-on-command
- Interference and Jammer detection with distinct Alarm
- Multifunctional Alarm Mapping
- Dual relay alarm outputs for external triggering
- Dynamic red alarm lighting
- Multi-mode transmitter with temperature control
- Programmable "Green" mode operation at 15 Watts
- Aluminum profile with UV Stabilized Acrylic
- Energy efficient

Optional Accessories

- Smart Pager System
- AM Label Deactivator
- E-COMM IP Communicator
- Printed Advertisement Banner
- AM Extender

Mechanical

Dimension (in mm) :
1694 (W) x 445 (H) x 64(bottom) 48 (top)

Poster Dimensions (H x W x T) :
373 x 1445 x 0.2

Pedestal Weight : 18 Kg

Auxiliary Base Weight: 11 Kg

Riser Height : 100 mm

Bumper (H x W x D) :
100 x 534 x 140

Composition :
Plastic, Acrylic, Aluminum

Electrical

Power requirement :
100-120VAC@60 Hz
220-240VAC@50 Hz

Operating Frequency:
58KHz

Alarm Mode :
Buzzer/Red Alarm Indicator

Detection Response

Hard tag :
1.8m maximum per pedestal (0.9 m / side)
12 m maximum between the pedestal

Environmental

Operating Temperature :
32° F - 120° F

Relative Humidity :
0-90%, Non-condensing



SURESOLUTIONS™
helping retail efficiency
— powered by Deki —

MARKETED & DISTRIBUTED BY

Profusion India Consulting

Electronic Security Solutions | Consulting

Shop No. 561, First Floor, Kesho Ram Complex, Burail, Sector 45-C, Chandigarh - 160047
M. : +91 9988885480, +91 9888810687, Tel. : +91 172 5035480, Website: www.profusionindia.com, E-mail : gurjeet@profusionindia.com